
SPECIFICATION FOR APPROVAL

Product	MAGNETIC BUZZER
Part No.	AC-901N-RPB
Customer Approval	


Approved By	Checked By	Made By




A & B Components

<http://www.speaker-tw.com>

AC-901N-RPB

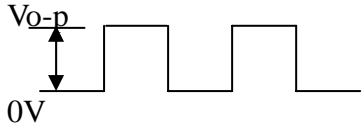Items		Units	Specifications			Conditions
01	Rated Voltage	Vo-p	1.5			
02	Operating Voltage	Vo-p	1.0~3.0			
03	Mean Current	mA (Max)	60			Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
04	Direct Current Resistance	Ohm	5.5±1			
05	Sound Output	dBA (min)	93			Distance at 10cm, applying rated voltage, rated frequency square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	3200			
07	Operating Temp.	°C	-40 ~ +85			
08	Storage Temp.	°C	-50 ~ +95			
09	Dimension	mm	Φ9x6	Height	4	See attached drawing.
10	Weight	Gram	1			
11	Terminal		Two Pins			See attached drawing.

※Standard Drive Circuit:

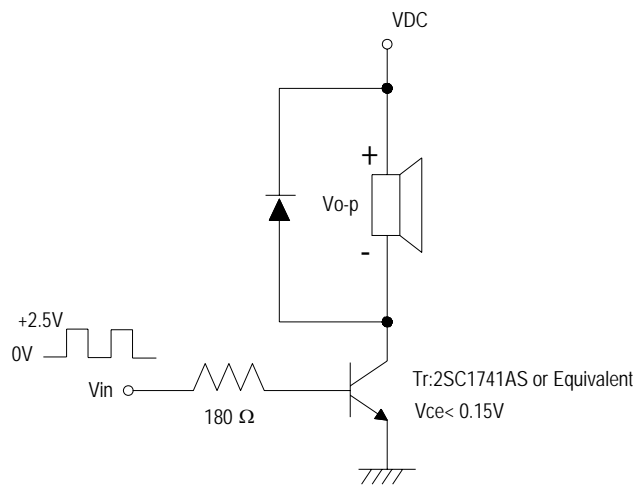

※Standard Conditions:

Temperature 15 ~ 35°C


Humidity 25 ~ 80 %

Air pressure 860 ~ 1060 HPa.


If the result is doubtful, should retested with the conditions below: Temp. 20±2°C, Humidity 60 ~ 70 %, Air pressure 860 ~ 1060 HPa.

※Note: As this product is not protected from foreign material entering, please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enters it.

STANDARD TEST FIXTURE

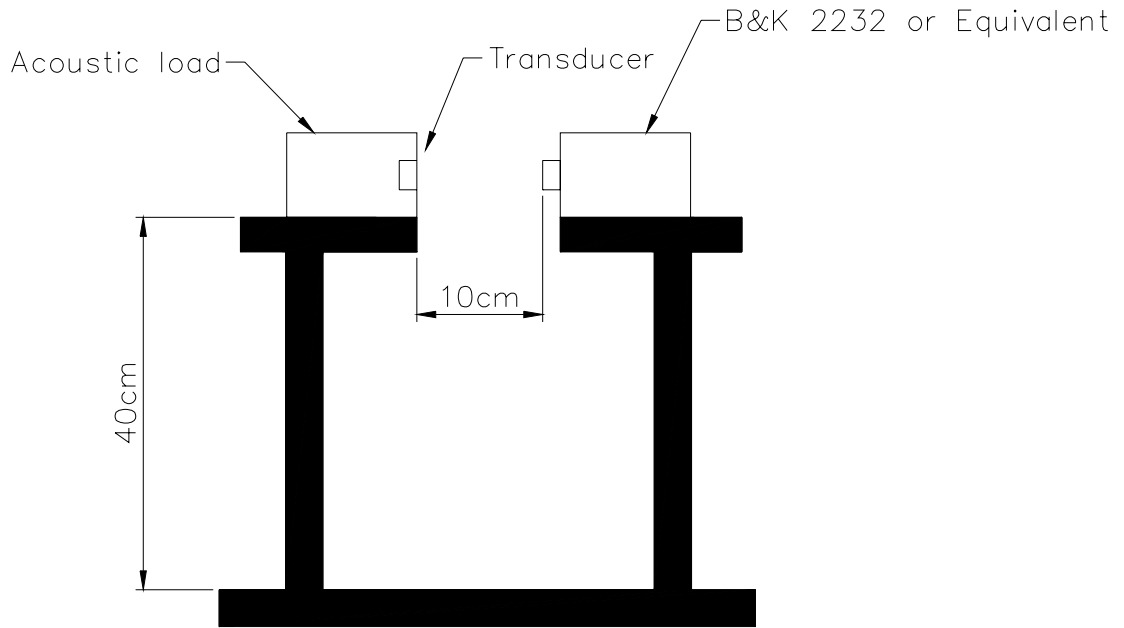

Standard test condition of magnetic buzzer

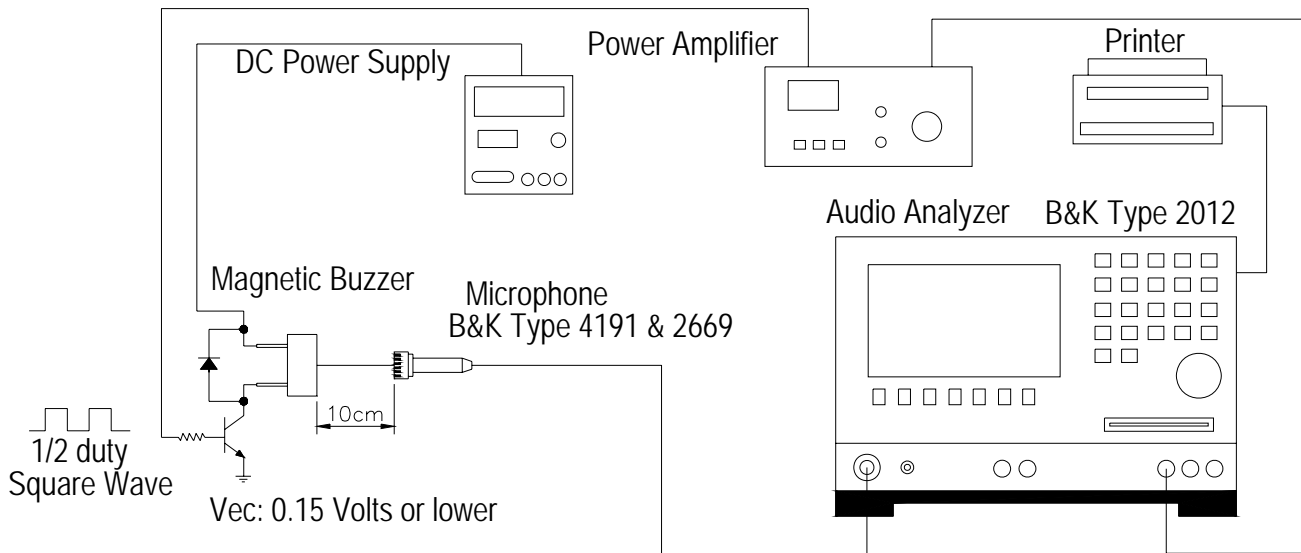


X:3.1623kHz

Y:94.29dB


ZA:Live Curve

SSR T. RMS

A: Frequency Response, Magn dB re 20.00 μ PA

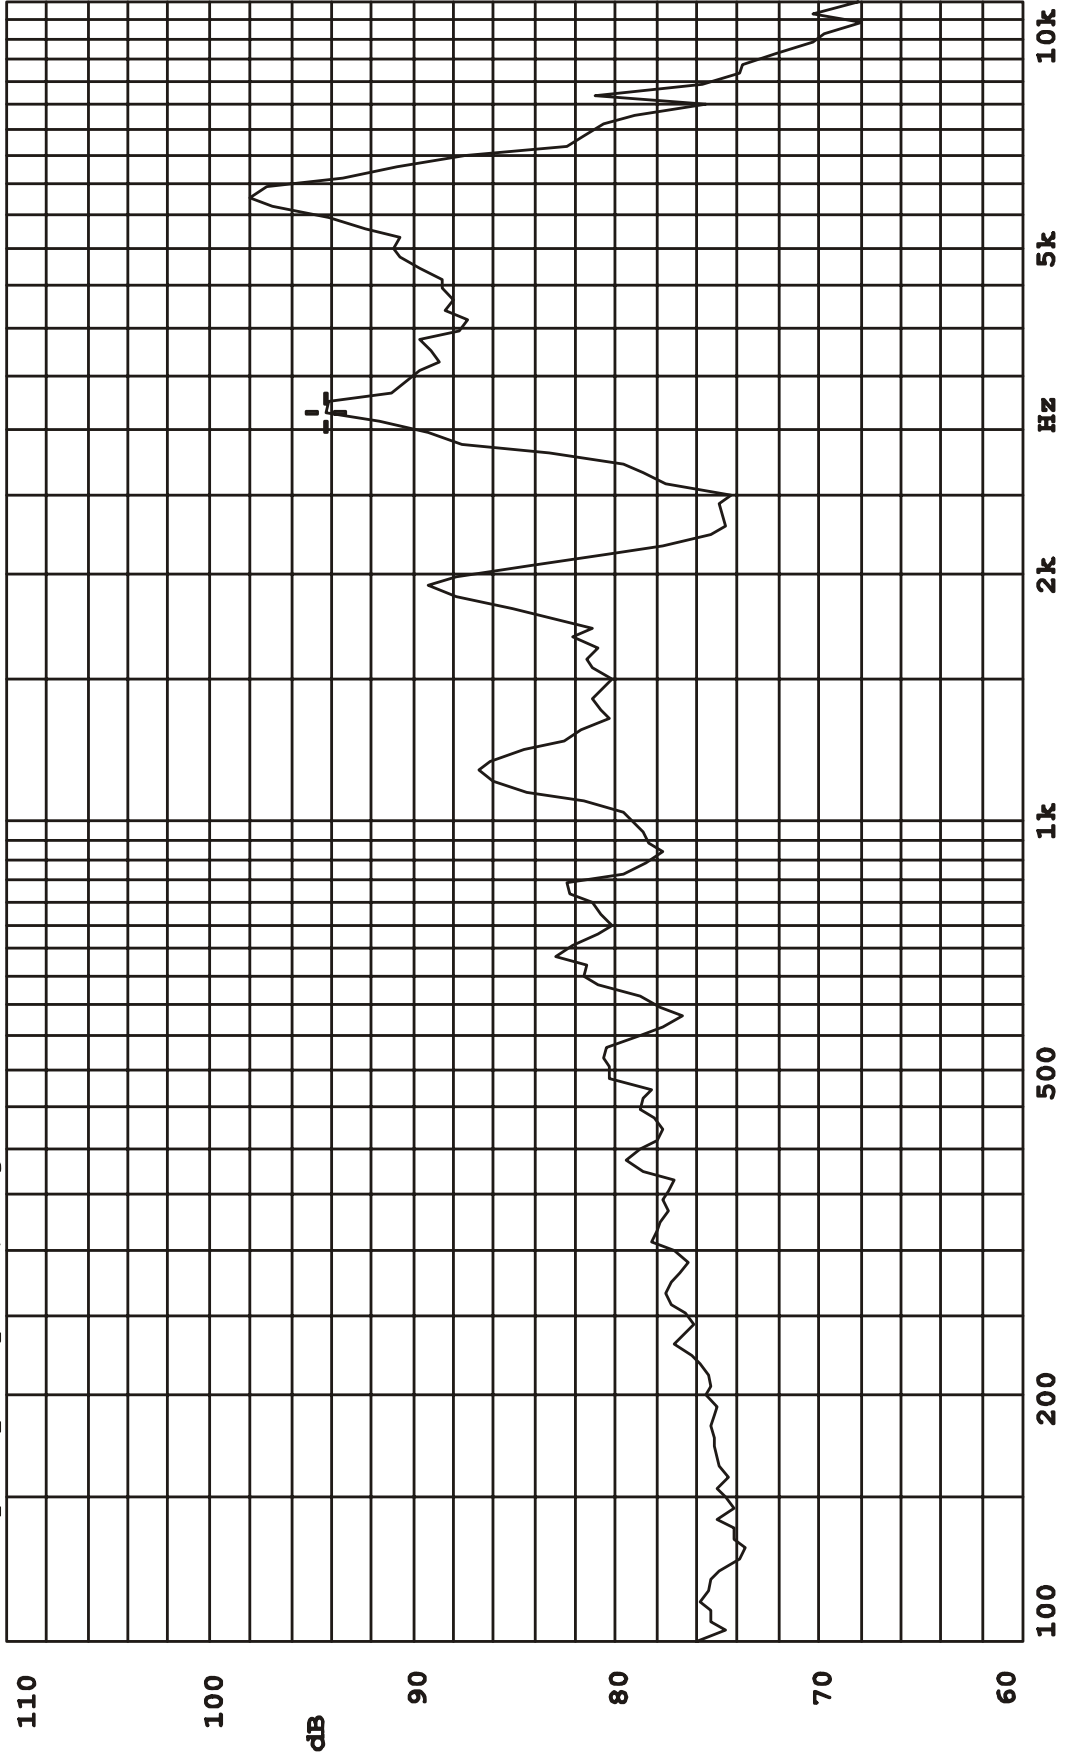

Mode: SSR


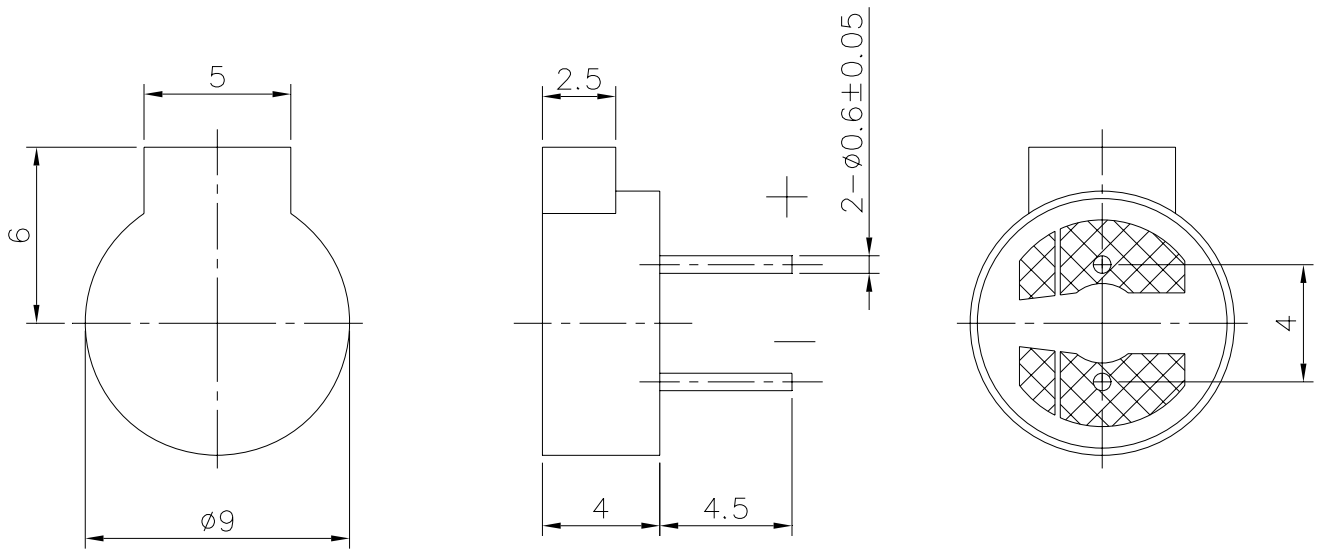


TITLE: <i>SOUND TRANSDUCER</i>		DRAWN: <i>Richard</i> 01/13/2003	SCALE: 4:1	SHEET: 1 of 1
PART NO. <i>AC-901N-RPB</i>		DESIGNED: R&D DEP.	UNITS: mm	
DWG NO. <i>DTE-2069</i>		1 REV	TOLERANCE ± 0.5	
			UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL \pm *** TWO PLACE DECIMAL \pm *** THREE PLACE DECIMAL \pm ***	
		APPROVAL:		
		MATERIAL: <i>NORYL</i>		

A & B Components

AC-901N-RPB

RELIABILITY TEST

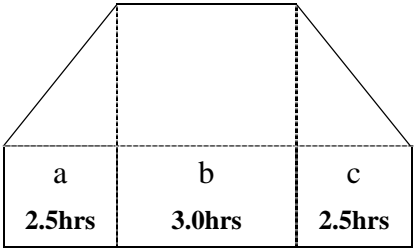Item	Test conditions	Evaluation standard
01 High temp. Storage life	The part shall be capable of withstanding a storage Temperature of 95°C for 96 hours.	After the test the part shall meet specifications without Any degradation in appearance and performance except S.P.L S.P.L shall be 85dB or more.
02 Low temp. Storage life	The part shall be capable of withstanding a storage Temperature of -50°C for 96 hours.	
03 Temp.cycle	The part shall be subjected 10 cycles. One cycle shall consist of; <div style="text-align: center;">  <p>The diagram shows a rectangular cycle. The top horizontal segment is labeled '-50°C' and '30min'. The bottom horizontal segment is labeled '95°C' and '30min'. The total width of the rectangle is labeled '60min'.</p> </div>	
04 Temp./Humidity cycle	The part shall be subjected 10 cycles. One cycle shall be 8 hours and consist of; <div style="text-align: center;">  <p>The diagram shows a trapezoidal cycle. The bottom horizontal segment is divided into three sections: 'a' (2.5hrs), 'b' (3.0hrs), and 'c' (2.5hrs). The left vertical segment is labeled '25°C' and the right vertical segment is labeled '95°C'. Below the diagram, it specifies: 'a,b:90~98%RH' and 'c :80~98%RH'.</p> </div>	

AC-901N-RPB

RELIABILITY TEST

Item	Test conditions	Evaluation standard
05 Vibration	The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm (9.3G). The vibration test shall consist of 2 hours per plane in each three mutually perpendicular planes for a total time Of 6 hours.	After the test the part shall meet specifications without Any degradation and performance except S.P.L S.P.L shall be 85dB or more.
06 Fixed drop	The part shall be mounted on 100g jig(standard pc board) and dropped from a height of 152cm onto a concrete floor 5 times in each 6 planes. (a total of 30 times)	
07 Free drop	The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times).	
08 Operating life	1. Ordinary temperature The part shall be subjected to 1000 hours at room temperature (25 ±10°C)with 1.5V,3200Hz applied. 2. High temperature The part shall be subjected to 500 hours at 85°C with 1.5V, 3200Hz applied. 3. Low temperature The part shall be subjected to 500 hours at -40°C with 1.5V, 3200Hz applied.	