

---

# SPECIFICATION FOR APPROVAL

Product	PIEZO BUZZER ELEMENT
Part No.	AE-5028E-N
Customer Approval	

Approved By	Checked By	Made By





**A & B Components**

<http://www.speaker-tw.com>

# AE-5028E-N

	ITEM	CONDITION
01	Type.	External -drive type sound element
02	Resonant Frequency (KHz)	2.8±0.4at 25± 2°C , 45~60% RH
03	Resonant Impedance (OHM)	500 OHM Max. at 25± 2°C , 45~60% RH
04	Capacity (PF)	35000±30 % at 1.0KHz 1Vrms
05	Plate Material	Brass
06	Operating Temperature (°C)	-20 to +60
07	Storage Temperature (°C)	-20 to +70

## Dimensions

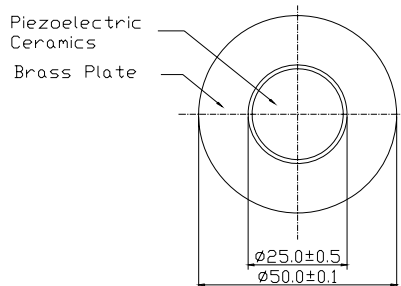

TOLERANCE:±0.5mm  
UNIT :mm

Drawing NO. : DEE-1041

## ■ Piezo Ceramic Test Fixture

1. Resonant Freq. → YHP – 4192A at 1 Vrms (sweep frequency : 1KHz)
2. Resonant Imp. → YHP – 4192A at 1 Vrms (sweep frequency : 1KHz)
3. Capacitance → YHP – 4192A at 1 KHz

## ■ Piezo Ceramic Reliability Test

No.	Item	Condition	Variance after Conditioning
01	High temperature	+70°C±2°C , 240 hrs	Resonant freq.: Initial value ±10%
02	Low temperature	-20°C±2°C , 240 hrs	
03	Humidity	+40°C±2°C , 90~95%RH , 240 hrs	
04	Thermal shock	-20°C±2°C (30min) →20°C (15min) →70°C±2°C (30min) →20°C (15min) 20 cycles	Capacitance: Initial value ±15%
05	Temp. dependence	On place -20~ +70°C rel. 20°C	Resonant freq.: ±15% Capacitance: 0.8% / °C

Test specimens shall be kept for 4 hrs. (25°C) before measurement.