
SPECIFICATION FOR APPROVAL

Product	PIEZO BUZZER
Part No.	AZ-3035E-W
Customer Approval	

Approved By	Checked By	Made By



A & B Components


<http://www.speaker-tw.com>

AZ-3035E-W


Items		Units	Specifications	Conditions
01	Rated Voltage	Vp-p	9	
02	Operating Voltage	Vp-p	1~30	
03	Rated Current	mA(Max)	9	At 9Vp-p
04	Sound Output At 10 cm	dBA(Min)	88	At 9Vp-p
05	Resonant Frequency	Hz	3500±500	
06	Operating Temp.	°C	-20 ~ +70	
07	Storage Temp.	°C	-30 ~ +80	
08	Lead wire	UL1095 AWG28		
09	Weight	g	3.5	
10	Capacitance at 120Hz	pF	20000±30%	

Value Applying at Rated Voltage.

STANDARD TEST FIXTURE

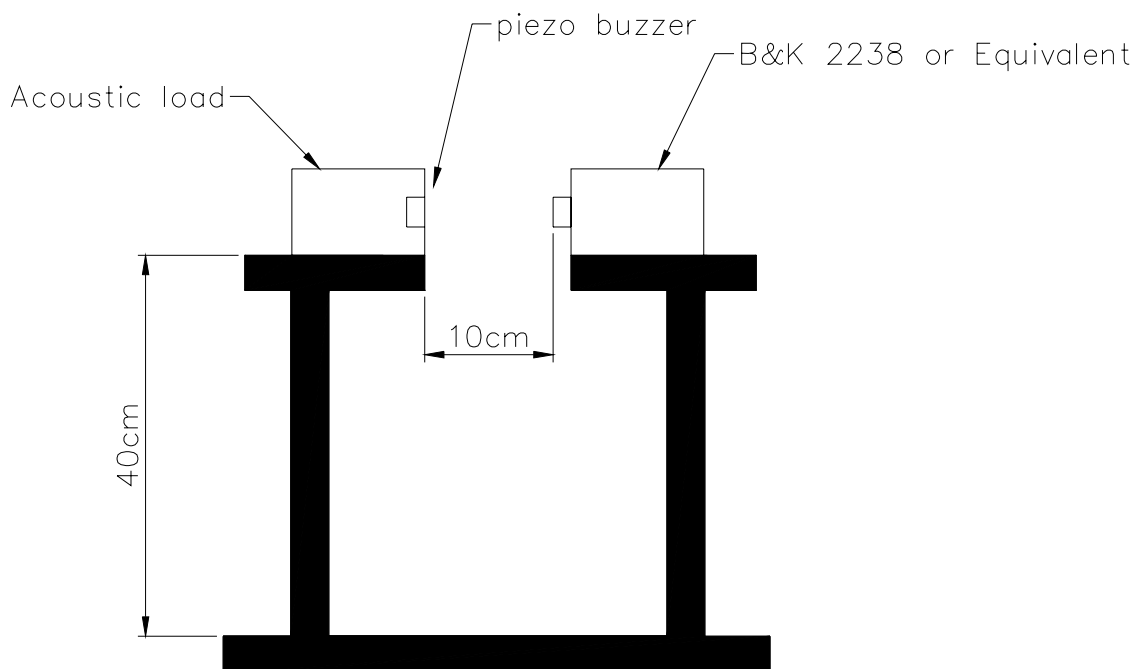

Standard test condition of piezo buzzer

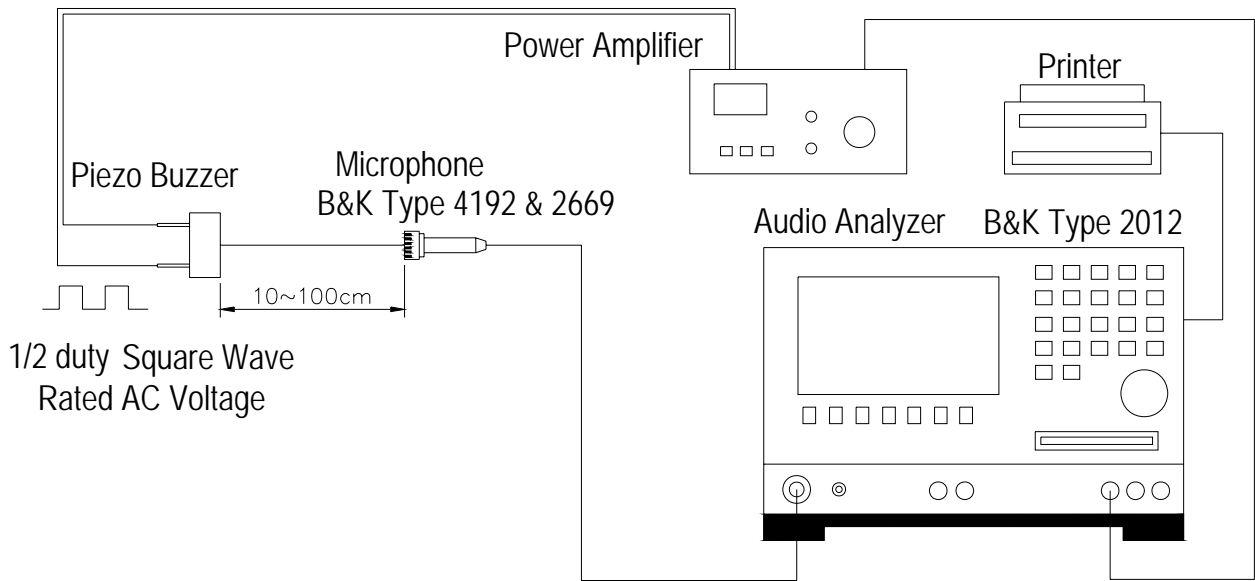

Frequency response curve


MODEL: AZ-3035E-W

X:3.5481kHz

Y:98.27dB

ZA:Live Curve



SSR T. RMS

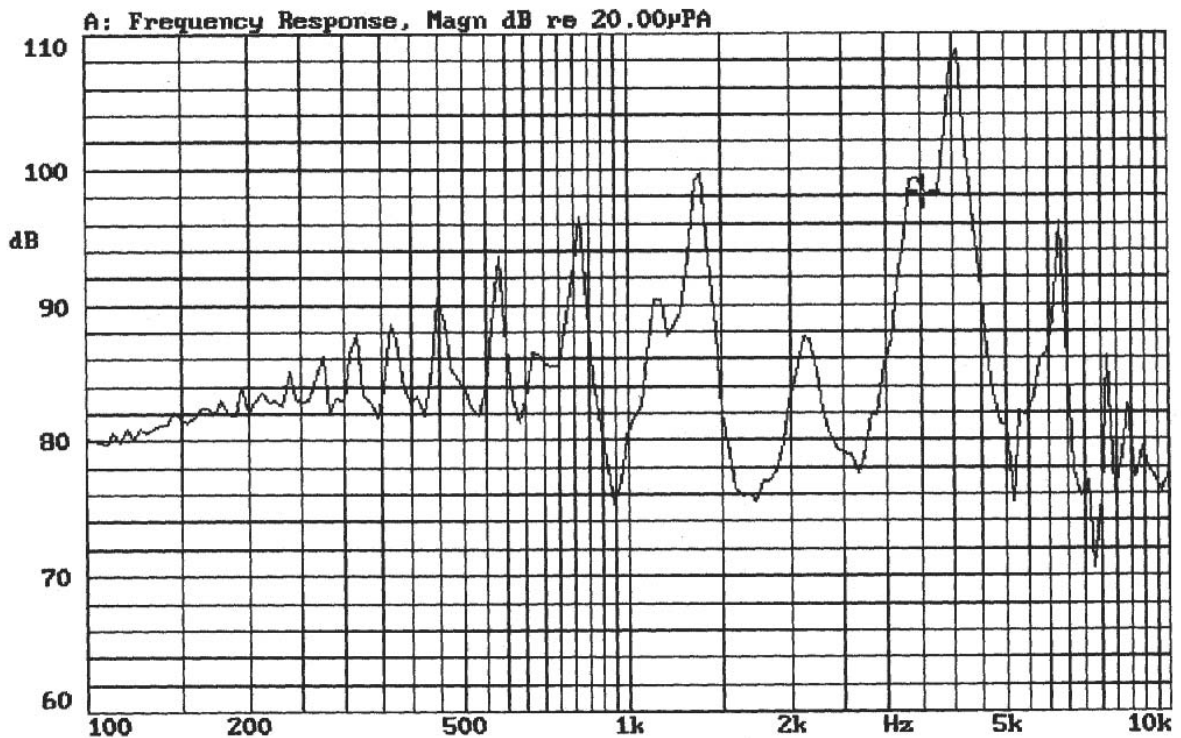

Mode: SSR



REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

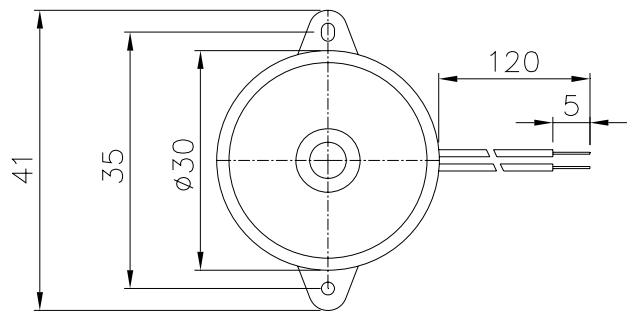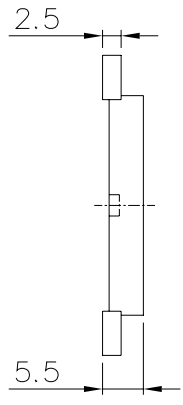

unit: mm tolerance: ±0.5mm
Housing material: ABS
Wave solder and wash not allowed

TITLE: <i>PIEZO BUZZER</i>		DRAWN: <i>Richard</i> 04/26/2001	SCALE: 1:1	SHEET: 1 OF 1
PART NO. <i>AZ-3035E-W</i>	<i>1</i>	DESIGNED: <i>R & D DEP.</i>	UNITS: <i>mm</i>	
DWG NO. <i>DTP-1022</i>		CHECKED:	TOLERANCE ± 0.5	
	REV	APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: <i>ABS</i>	ONE PLACE DECIMAL ± ***	
			TWO PLACE DECIMAL ± ***	
			THREE PLACE DECIMAL ± ***	

A & B Components

RELIABILITY TEST

AZ-3035E-W

Item	Conditions	Evaluation standard
01 Low Temp. Storage Test	A°C±2°C ,240Hr	(S.P.L)Test before numerical ±10dB *wrong (Frequency)Test before numerical ±10% (Current)Test before numerical ±10% (No crake is allowed on the part surface after Free drop test) ● After the test ,the part shall meet the specifications without any degradation in appearance and performance
02 High Temp.Storage Test	B°C±2°C RH50% ,240Hr	
03 Temp./Humidity Storage Test	40°C±2°C , RH90-95% 240Hr	
04 Thermal Shock Test	A°C±2°C (1Hr)→ ,20°C±2°C (1Hr) B°C±2°C (1Hr)→ ,20°C±2°C (1Hr)10 cycle	
05 Vibration Test	10-55Hz/1min amplitude1.5mm,X,Y,Z,3 directions	
06 Mechanical Shock Test	+100G,Sine wave, XYZ , 3 impacts per axis	
07 Free Drop Test	The part shall be dropped freely from a height of 75 cm onto concrete 1 time in 2 axes (total 4 times)	
08 Life Burning Test	The part shall be subjected to 1000 hrs in the room temp with rated voltage applied	
09 Lead Wire / Pin Pull Test	The Part checking standard : Following supplier's Spec. Finished-part checking Standard vertical Pull i)100g MIN 0.05mm Thickness of ceramic ii)300g MIN 0.1mm ≤ Thickness of ceramic b: Horizontal Pull i)700g MIN	

Remark : "A"means Storage low temp. "B"means Storage high temp